




# uni\_one FORMAT38

DOUBLE GLAZING **Uw=1,3 W/m²K**

TRIPLE GLAZING **Uw=0,85 W/m²K**

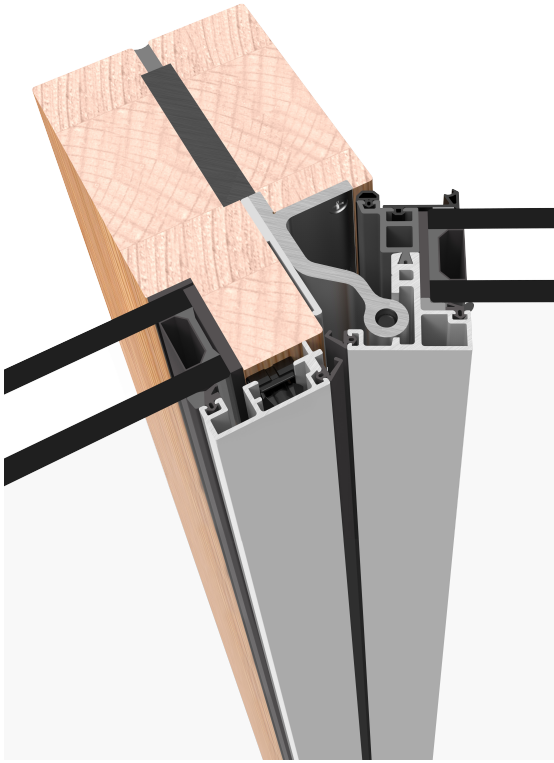


Material	Wood-Aluminium
Thermal insulation	Uw= 1,3 W/m²K  Uw= 0,85 W/m²K
Insulating glass	Double glazing thickness 31-37mm  Triple glazing thickness 41,5-47mm
Acoustic insulation	Rw up to 42 dB
Security hardware	RC2N
<b>Dimensions in mm.</b>	
Overall dimensions	40 x 161mm
Visible section	40mm
Air permeability	CLASS 4
Water tightness	CLASS E1200
Wind load resistance	CLASS C4

The thermal transmittance values are calculated according to UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011 standards, in reference to a window with 1 sash WxH (1200x1400mm,  $\psi_g = 0,04$  W/mK)


The air-water-wind tightness performances are certified in reference to a window with 1 sash WxH (1000x2440mm)

The acoustic insulation values are certified in reference to a window with 1 sash WxH (1200x1400mm)

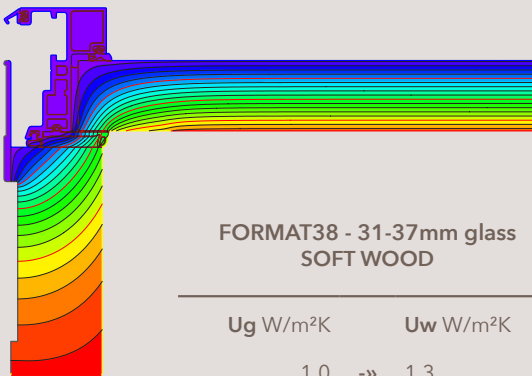

FORMAT38 - 31-37mm glass  
SOFT WOOD

Ug W/m²K	Uw W/m²K
1,0	-> 1,3
1,1	-> 1,4
1,2	-> 1,5
1,3	-> 1,6
1,4	-> 1,6
1,5	-> 1,7
1,6	-> 1,8

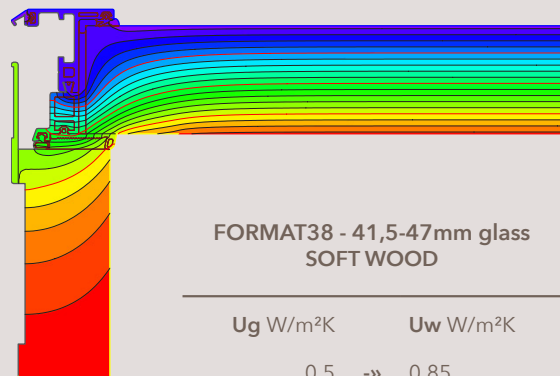

FORMAT38 - 41,5-47mm glass  
SOFT WOOD

Ug W/m²K	Uw W/m²K
0,5	-> 0,85
0,6	-> 0,91
0,7	-> 1,0
0,8	-> 1,1
0,9	-> 1,2
1,0	-> 1,3
1,1	-> 1,4